




DEEP GROOVE BALL BEARING



Bearing No.	Dimensions (mm)			Basic Dynamic Load Rating CR(KN)	Basic Static Load Rating COR(KN)	Weight (kg)
	d	D	B			
6002	15	32	9	5.85	2.85	0.030
6003	17	35	10	6	3.25	0.04
6004	20	42	12	9.38	5.03	0.068
6005	25	47	12	10.1	5.83	0.079
6006	30	55	13	13.2	8.3	0.113
6007	35	62	14	16.2	10.4	0.149
6008	40	68	15	17.03	11.70	0.184
6009	45	75	16	21.09	14.77	0.230
6010	50	80	16	22.02	16.25	0.257
6011	55	90	18	26.61	20.07	0.383
6012	60	95	18	31.66	24.22	0.382
6013	65	100	18	32.06	24.89	0.410
6014	70	110	20	38.59	30.43	0.576
6015	75	115	20	40.18	33.18	0.622
6016	80	125	22	47.54	39.79	0.822
6017	85	130	22	50.75	42.89	0.892
6018	90	140	24	58.02	49.78	1.013
6019	95	145	24	57.79	50.09	1.156
6020	100	150	24	64.46	56.13	1.620
6021	105	160	26	71.92	63.32	1.520
6022	110	170	28	81.89	72.86	1.691
6024	120	180	28	87.69	79.35	1.990
6026	130	200	33	105.08	96.82	3.073
6028	140	210	33	116.33	108.50	3.14
6030	150	225	35	131.71	124.55	3.74
6032	160	240	38	143.42	137.81	5.30

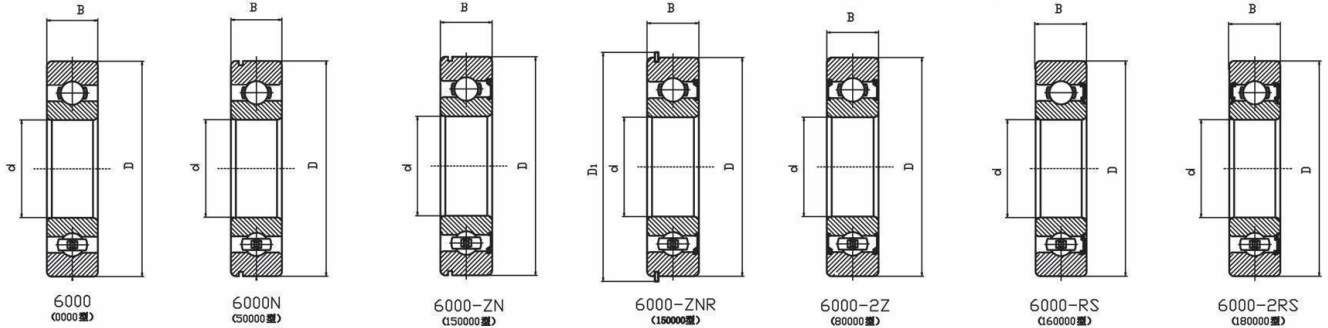

DEEP GROOVE BALL BEARING

Bearing No.	Dimensions (mm)			Basic Dynamic Load Rating CR(KN)	Basic Static Load Rating COR(KN)	Weight (kg)
	d	D	B			
6200	10	30	9	5.1	2.39	0.032
6201	12	32	10	6.8	3.05	0.037
6202	15	35	11	7.8	3.75	0.045
6203	17	40	12	9.56	4.75	0.065
6204	20	47	14	12.7	6.55	0.103
6205	25	52	15	14	7.80	0.127
6206	30	62	16	19.46	11.31	0.202
6207	35	72	17	25.67	15.30	0.285
6208	40	80	18	29.52	18.14	0.365
6209	45	85	19	31.67	20.68	0.405
6210	50	90	20	35.07	23.18	0.465
6211	55	100	21	43.38	29.22	0.592
6212	60	110	22	47.76	32.93	0.788
6213	65	120	23	57.21	40.00	0.948
6214	70	125	24	60.83	45.03	1.070
6215	75	130	25	66.11	49.50	1.185
6216	80	140	26	71.55	54.30	1.405
6217	85	150	28	83.21	63.96	1.780
6218	90	160	30	95.98	71.45	2.157
6219	95	170	32	110.28	82.81	2.620
6220	100	180	34	122.14	92.72	3.233
6221	105	190	36	132.99	104.45	3.782
6222	110	200	38	144.07	117.06	4.421
6224	120	215	40	155.32	130.99	5.30
6226	130	230	40	35.62	165.04	6.11
6228	140	250	42	43.11	179.14	7.75
6230	150	270	45	203.11	198.98	9.77
6300	10	35	11	7.65	3.48	0.053
6301	12	37	12	9.72	5.08	0.06
6302	15	42	13	11.40	5.40	0.082
6303	17	47	14	13.50	6.55	0.115
6304	20	52	15	15.90	7.80	0.141
6305	25	62	17	22.50	11.60	0.129
6306	30	72	19	27.00	15.19	0.347
6307	35	80	21	33.36	19.21	0.454
6308	40	90	23	40.75	21.01	0.633
6309	45	100	25	52.86	31.83	0.836



DEEP GROOVE BALL BEARING

Bearing No.	Dimensions (mm)			Basic Dynamic Load Rating CR(KN)	Basic Static Load Rating COR(KN)	Weight (kg)
	d	D	B			
6310	50	110	27	61.86	37.94	1.081
6311	55	120	29	71.57	44.76	1.369
6312	60	130	31	81.75	51.85	1.706
6313	65	140	33	93.87	60.44	2.097
6314	70	150	35	104.13	68.04	2.435
6315	75	160	37	113.42	76.97	2.987
6316	80	170	39	122.94	86.50	3.612
6317	85	180	41	132.67	96.58	4.284
6318	90	190	43	144.05	108.49	4.979
6319	95	200	45	156.66	121.98	5.740
6320	100	215	47	172.98	140.39	7.090
6321	105	225	49	183.69	153.08	8.03
6322	110	240	50	204.96	178.31	9.50
6324	120	260	55	227.59	207.40	12.2
6406	30	90	23	47.33	24.50	0.715
6407	35	100	25	55.74	29.35	0.922
6408	40	110	27	63.71	36.58	1.218
6409	45	120	29	77.38	45.38	1.495
6410	50	130	31	92.29	55.13	1.860
6411	55	140	33	100.67	62.45	2.400
6412	60	150	35	109.11	70.06	2.820
6413	65	160	37	118.14	78.57	3.350
6414	70	180	42	139.50	99.56	4.640
6415	75	190	45	153.75	114.32	5.690
6416	80	200	48	163.22	124.55	6.740
6417	85	210	52	174.90	137.49	7.910
6418	90	225	54	192.48	157.63	9.550
6420	100	250	58	223.08	194.61	12.813